


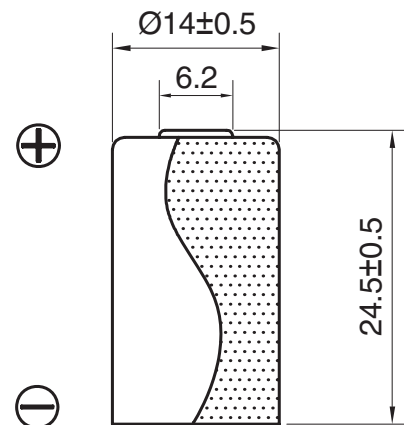



Model No.: **GPCR14250**

<b>Description</b>	: Lithium Battery, 1/2AA Size
<b>Chemical System</b>	: Lithium Manganese Dioxide
<b>Nominal Voltage</b>	: 3.0 Volts
<b>Nominal Capacity</b>	: 800mAh @ 10mA to 1.8V at 23°C
<b>Dimensions</b>	: Ø14 mm x 24.5 mm
<b>Terminals</b>	: Flat, Recessed Negative Terminal
<b>Jacket</b>	: PVC Resin Label
<b>Shelf Life</b>	: Up to 10 years
<b>Average Weight</b>	: App. 10g
<b>Max. Constant Current</b>	: 1000mA
<b>Max. Pulse Current</b>	: 2500mA
<b>Application</b>	: Sensors, Cameras, flashlights, memory back-up, medical equipment, meters (gas/ electric/ water), photoflash, electronic guns, etc.
<b>Operating Temperature</b>	: -40°C to +60°C
<b>UL Standard</b>	: UL1642 (File no. MH46184)
<b>IEC Standard</b>	: IEC60086-4
<b>UN Standard</b>	: UN38.3

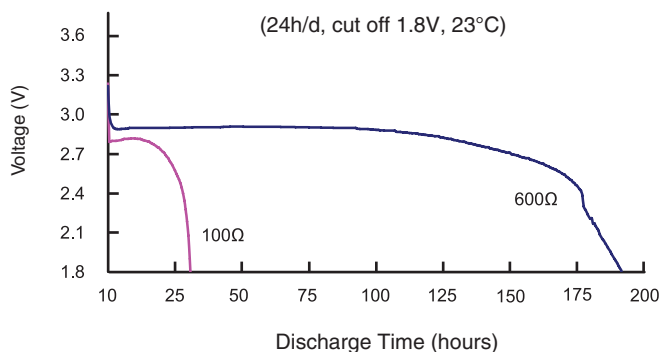

Unit : mm

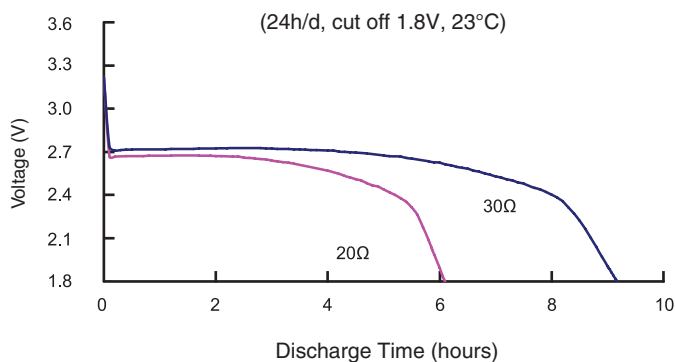

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.